



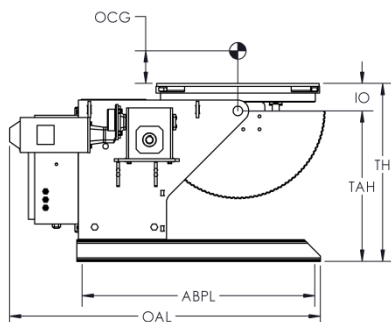

WELDING POSITIONER: PE 60 HD12

The PE 60 HD12 welding positioner is ideal for construction, OEM, oil & gas, and contract manufacturing applications. It delivers precise, repeatable, and safe operation. Better positioning yields higher quality welds, improved productivity, and a lower risk of operator injury.

PRESTON EASTIN MODEL PE 60 HD12 PRODUCT DATA		
<p>Capacity</p> <ul style="list-style-type: none"> • Weight: 6000 pounds • Offset of CG from table: 12" • Eccentricity of CG from axis: 12" <p>Rotation</p> <ul style="list-style-type: none"> • Motor: Variable Speed AC 2HP • Speed Range: 0.4 to 1.18RPM • Speed Accuracy: 2% of set speed <p>Tilt</p> <ul style="list-style-type: none"> • Motor: AC Brake motor 2 HP • Range: 0°-135° forward tilt 	<p>Table</p> <ul style="list-style-type: none"> • Size: 42" Square with four radial T-Slots • Mounting bolt size: ¾" • Bearings: Tapered roller bearings <p>Elevation</p> <ul style="list-style-type: none"> • Adjustment: Manual • Range: 37-1/8 inches to 57-1/8 inches in 5 inch increments (Table top) <p>Controls</p> <ul style="list-style-type: none"> • Pendant: Remote Pendant with 30' cable 	<p>Electricals</p> <ul style="list-style-type: none"> • Ground: (2) each, 600 Amp spring loaded mechanical ground • Power: 480V Three Phase, 60 Hz • Table Drive: Variable Frequency Drive [VFD] • Tilt Drive: Variable Frequency Drive [VFD] • Overload Protection: Circuit Breaker • Foot Switch: Optional <p>Weight</p> <ul style="list-style-type: none"> • Shipping Weight: 3400 lbs.

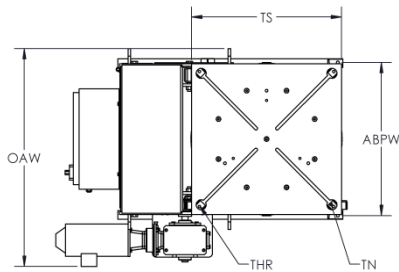

Symbol	Description	Dim.
OAL	Overall Length	86 1/8"
OAW	Overall Width	48 3/4"
TH	Table Height	37 1/8"
TAH	Tilt Axis Height	30 1/8"
IO	Inherent Overhang	7"
OCG	Offset Center of Gravity	12"
TS	Table Size	42"
ABPL	Anchor Bolt Pattern Length	64"
ABPW	Anchor Bolt Pattern Width	44 3/4"
THR	T-Nut Thread	¾"-10
TN	T-Nut Quantity	4